


Laser Diode 1310nm 2mW

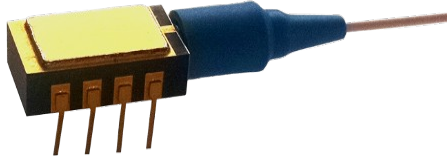

FPL-1310-8DL-2 is single mode laser diode module designed for optical measurement and communication. The laser is packaged in 8-pin miniDIL package with monitor photodiode. Module is pigtailed with 0,7-1,0 m of single mode polarization maintaining fiber and connectorized by FC/PC connector.

Key Features

- Optical output: 2mW
- Efficient coupling into single mode fiber
- CW or pulsed operation
- SM or PM Fiber (ø0.9mm)
- FC-PC connector
- 8-pin miniDIL package
- Internal monitor PD
- Low power consumption

Optical and electrical characteristics: (T = 25°C)

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Output Power	P_f		1	2	3	mW
Forward Voltage	V_F	$P_f=2mW$			2.5	V
Threshold Current	I_{th}			7		mA
Forward Current	I_F	$P_f=2mW$		20		mA
Rise Time	T_r	$P_f=2mW, 20\%-80\%$			150	ps
Fall Time	T_f	$P_f=2mW, 20\%-80\%$			150	ps
Center Wavelength	λ_c	$P_f=2mW$	1290	1310	1330	nm
Spectral Width	$\Delta\lambda$	$P_f=2mW$		2	3	nm
Monitor Current	I_m	$P_f=2mW, V_{RD}=5V$	40		500	μA
PD Dark Current	I_d	$V_{RD}=5V$			0.1	μA
Extinction Ratio	X_P	$P_f=20mW$	17			dB

Absolute Maximum Ratings

Item	Symbol	Rating	Unit
LD Forward Current	I_f	50	mA
LD Reverse Voltage	V_r	1.8	V
PD Reverse Voltage	V_{RD}	10	V
Operation Case Temperature	T_C	-40 to +85	°C
Storage Temperature	T_{stg}	-40 to +85	°C

PACKAGING

No.	FUNCTION	No.	FUNCTION
1	NC	5	PD anode -
2	LD anode +	6	LD cathode -, case
3	LD cathode -, case	7	NC
4	PD cathode +	8	NC

