


## Semiconductor Optical Amplifier 1060nm

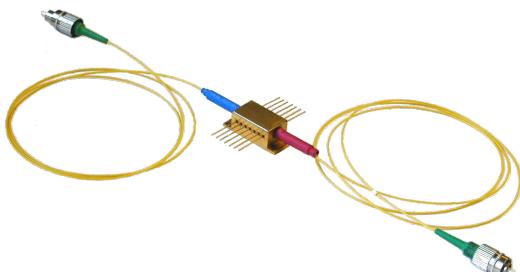

SOA-1060-14BF Semiconductor Optical Amplifier (SOA) is single-pass, traveling-wave amplifier that perform well with both monochromatic and multi-wavelength signals. The SOA consists of a highly efficient InP/InGaAsP Multiple Quantum Well (MQW) layer structure.

### Key Features

- Single mode input/output
- Low chip-to-fiber coupling loss
- CW or pulsed operation
- SM or PM Fiber ( $\phi 0.9\text{mm}$ )
- FC-APC connectors
- 14-pin butterfly package
- Built-in thermistor and TEC
- Low power consumption

### Optical and electrical characteristics: ( $T = 25^\circ\text{C}$ )

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Fiber to fiber Gain	G	CW, $I_F = 300\text{mA}$	20	24	28	dB
Forward Current	$I_F$			300	350	mA
Forward Voltage	$V_F$				2.5	V
Center Wavelength	$\lambda_c$	CW, $I_F = 300\text{mA}$	1045	1050	1055	nm
Spectral Width	$\Delta\lambda$	CW, $I_F = 300\text{mA}$	30	35	40	nm
Saturation Power	$P_s$	CW, $I_F = 300\text{mA}$		10	12	dBm
Noise Figure	NF	CW, $I_F = 300\text{mA}$	7	8	9	dB
Gain Ripple	$\delta G$	CW, $I_F = 300\text{mA}$		1	2	dB
Polarization Dependent Gain	PDG	CW, $I_F = 300\text{mA}$		10		dB
Cooler Voltage	$V_C$	$I_F=EOL, TC=70^\circ\text{C}$			2.7	V
Cooler Current	$I_C$	$I_F=EOL, TC=70^\circ\text{C}$			1.4	A
Thermal Resistance	$R_o$	$T_{LD}=25^\circ\text{C}, B=3900\pm100\text{K}$	9.5	10.0	10.5	$\text{k}\Omega$

## Absolute Maximum Ratings

Item	Symbol	Rating	Unit
LD Forward Current	$I_f$	400	mA
LD Reverse Voltage	$V_r$	1.8	V
Operation Case Temperature	$T_c$	-20 to +70	°C
Storage Temperature	$T_{stg}$	-20 to +85	°C
Cooler Current	$I_c$	1.4	A

## PACKAGING

No.	FUNCTION	No.	FUNCTION
1	Cooler anode	8	NC
2	Thermistor	9	NC
3	NC	10	LD anode
4	NC	11	LD cathode
5	Thermistor	12	NC
6	NC	13	Case
7	NC	14	Cooler anode

