


## Tunable Laser Diode 1650nm 100mW

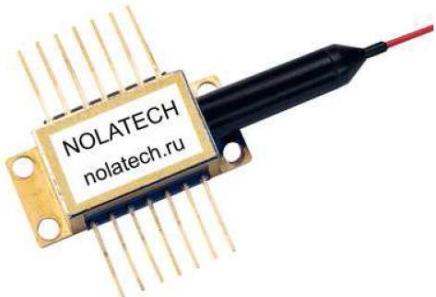

TLD-1650-14BF-100 Fiber Bragg Grating laser is a stable narrow band light source with a wavelength tuning possibility in 1-2 nm range. The laser is packaged in 14-pin standard butterfly package with monitor photodiode and thermo-electric cooler (TEC).

### Key Features

- Optical output: 100mW
- Narrow linewidth ( $\Delta\nu < 0.1\text{MHz}$ )
- Tuning range: > 1nm
- Wavelength: 1650nm
- SM or PM fiber
- FC-APC connector
- Internal monitor PD and TEC
- 14-pin butterfly package

### Optical and electrical characteristics: (T = 25°C)

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Output Power	P <sub>f</sub>			100	150	mW
Forward Voltage	V <sub>F</sub>	P <sub>f</sub> =100mW			2.5	V
Threshold Current	I <sub>th</sub>		50		70	mA
Forward Current	I <sub>F</sub>	P <sub>f</sub> =100mW		800	1000	mA
Center Wavelength	λ <sub>c</sub>	P <sub>f</sub> =100mW	1630		1650	nm
Spectral Width	Δλ	P <sub>f</sub> =100mW		100		kHz
Side Mode Suppression Ratio	SMSR	P <sub>f</sub> =100mW	30	40		dB
Relative Intensity Noise	RIN	P <sub>f</sub> =100mW		-145		dB/Hz
Monitor Current	I <sub>m</sub>	P <sub>f</sub> =100mW, V <sub>RD</sub> =5V	40		200	μA
PD Dark Current	I <sub>d</sub>	V <sub>RD</sub> =5V			0.1	μA
Cooler Voltage	V <sub>C</sub>	I <sub>F</sub> =EOL, TC=70°C			2.7	V
Cooler Current	I <sub>C</sub>	I <sub>F</sub> =EOL, TC=70°C			1.4	A
Thermal Resistance	R <sub>o</sub>	T <sub>LD</sub> =25°C, B=3900±100K	9.5	10.0	10.5	kΩ
Extinction Ratio	X <sub>P</sub>	P <sub>f</sub> =100mW	17			dB
Mode Hop Free Range	ΔI			15		mA
Tuning Range	Δf		1	1.5		nm
PZT Tuning Voltage	V <sub>T</sub>		0		150	V
Current Tuning	Δλ/ΔI			0.001		nm/mA
Temperature Tuning	Δλ/ΔT			0.08		nm/°C

## Absolute Maximum Ratings

Item	Symbol	Rating	Unit
LD Forward Current	I <sub>f</sub>	1200	mA
LD Reverse Voltage	V <sub>r</sub>	1.8	V
PD Reverse Voltage	V <sub>RD</sub>	10	V
Operation Case Temperature	T <sub>c</sub>	-40 to +70	°C
Storage Temperature	T <sub>stg</sub>	-40 to +85	°C
Cooler Current	I <sub>c</sub>	1.4	A

## PACKAGING

No.	FUNCTION	No.	FUNCTION
1	Cooler anode +	8	PZT tuning -
2	Thermistor	9	NC
3	PD anode -	10	LD anode +
4	PD cathode +	11	LD cathode -
5	Thermistor	12	NC
6	NC	13	Case
7	PZT tuning +	14	Cooler anode -

