


FPL-520-14DL

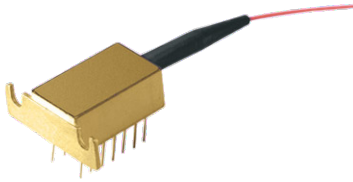

Single mode Fabry-Perot laser diode module designed for optical measurement and communication. The laser is packaged in 14pinDIL package with monitor photodiode and thermo-electric cooler (TEC). Module is pigtailed with 0.5-0.9 m of single mode or polarization maintaining (optional) fiber and connectorized by FC/PC connector.

Optical and electrical characteristics:

Parameter	Symbol	Test condition	Min.	Typ.	Max.	Unit
Optical Power	P_f	CW		10	20	mW
Pulsed Optical Power	P_{fp}	Pulse, $\tau=10\mu s$, $D=1\%$		30		mW
Threshold Current	I_{th}			40	60	mA
Forward Current	I_f	P_f		100	130	mA
Pulsed Forward Current	I_{fp}	P_{fp} , $\tau=10\mu s$, $D=1\%$		150		mA
Forward Voltage	V_f	P_f		7	8	V
Center Wavelength	λ_c	P_f	515	520	530	nm
Spectral Width	$\Delta\lambda_c$	P_f		1	3	nm
Monitor Current	I_m	P_f	10		500	μA
PD Dark Current	I_d	$V_{rd}=5V$			0.1	μA
TEC Current	I_t	I_t			1.4	A
TEC Voltage	V_t	TC=70°C			2.7	V
Thermal Resistance	R_0	T=25°C, B=3900±100K	9.5	10	10.5	kΩ
Extinction Ratio (PM fiber)	X_p	P_f	20			dB

Absolute maximum ratings:

Parameter	Symbol	Rating	Unit
Forward Current	I_f	150	mA
Reverse Voltage	V_r	1.8	V
Reverse Voltage	V_{rd}	7	V
Minimum Operation Case Temperature	T_{ol}	-40	°C
Maximum Operation Case Temperature	T_{oh}	70	°C
Minimum Storage Temperature	T_{sl}	-40	°C
Maximum Storage Temperature	T_{sh}	70	°C
TEC Current	I_t	1.5	A

Packaging:

14pinDIL:			
№	Parameter	№	Parameter
1	Cooler anode +	8	PD anode -
2	NC	9	LD cathode -
3	NC	10	NC
4	NC	11	Thermistor
5	LD anode +	12	Thermistor
6	NC	13	NC
7	PD cathode +	14	Cooler cathode -

