


## SLD-1300-14DL

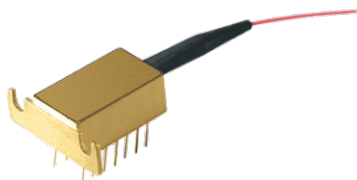

Superluminescent light source for fiber transmission systems, fiberoptic gyros, fiberoptic sensors, optical coherence tomography, optical measurements. The laser is packaged in 14pinDIL package with monitor photodiode and thermo-electric cooler (TEC). Module is pigtailed with 0.5-0.9 m of single mode or polarization maintaining (optional) fiber and connectorized by FC/APC connector.

### Optical and electrical characteristics:

Parameter	Symbol	Test condition	Min.	Typ.	Max.	Unit
Optical Power	$P_f$	CW	2	5		mW
Forward Current	$I_f$	$P_f$		150	300	mA
Forward Voltage	$V_f$	$P_f$			2.5	V
Center Wavelength	$\lambda_c$	$P_f$	1290	1300	1310	nm
Spectral Width	$\Delta\lambda_c$	$P_f$	20	25		nm
Monitor Current	$I_m$	$P_f$	20		2000	$\mu$ A
PD Dark Current	$I_d$	$V_{rd}=5V$			0.1	$\mu$ A
TEC Current	$I_t$	$I_t$			1.4	A
TEC Voltage	$V_t$	TC=70°C			2.7	V
Thermal Resistance	$R_0$	T=25°C, B=3900±100K	9.5	10	10.5	kΩ
Extinction Ratio (PM fiber)	$X_p$	$P_f$	20			dB

### Absolute maximum ratings:

Parameter	Symbol	Rating	Unit
Forward Current	$I_f$	350	mA
Reverse Voltage	$V_r$	1.8	V
Reverse Voltage	$V_{rd}$	7	V
Minimum Operation Case Temperature	$T_{ol}$	-40	°C
Maximum Operation Case Temperature	$T_{oh}$	70	°C
Minimum Storage Temperature	$T_{sl}$	-40	°C
Maximum Storage Temperature	$T_{sh}$	70	°C
TEC Current	$I_t$	1.5	A

Packaging:

14pinDIL:			
№	Parameter	№	Parameter
1	Cooler anode +	8	PD anode -
2	NC	9	LD cathode -
3	NC	10	NC
4	NC	11	Thermistor
5	LD anode +	12	Thermistor
6	NC	13	NC
7	PD cathode +	14	Cooler cathode -

