


SLD-1550-14DL

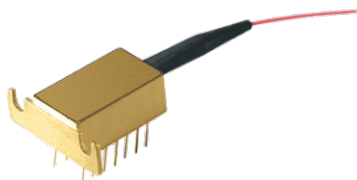

Superluminescent light source for fiber transmission systems, fiberoptic gyros, fiberoptic sensors, optical coherence tomography, optical measurements. The laser is packaged in 14pinDIL package with monitor photodiode and thermo-electric cooler (TEC). Module is pigtailed with 0.5-0.9 m of single mode or polarization maintaining (optional) fiber and connectorized by FC/APC connector.

Optical and electrical characteristics:

Parameter	Symbol	Test condition	Min.	Typ.	Max.	Unit
Optical Power	P_f	CW	2	5		mW
Forward Current	I_f	P_f		200	300	mA
Forward Voltage	V_f	P_f			2.5	V
Center Wavelength	λ_c	P_f	1520	1530	1550	nm
Spectral Width	$\Delta\lambda_c$	P_f	30	35		nm
Monitor Current	I_m	P_f	20		2000	μ A
PD Dark Current	I_d	$V_{rd}=5V$			0.1	μ A
TEC Current	I_t	I_t			1.4	A
TEC Voltage	V_t	TC=70°C			2.7	V
Thermal Resistance	R_0	T=25°C, B=3900±100K	9.5	10	10.5	kΩ
Extinction Ratio (PM fiber)	X_p	P_f	20			dB

Absolute maximum ratings:

Parameter	Symbol	Rating	Unit
Forward Current	I_f	450	mA
Reverse Voltage	V_r	1.8	V
Reverse Voltage	V_{rd}	7	V
Minimum Operation Case Temperature	T_{ol}	-40	°C
Maximum Operation Case Temperature	T_{oh}	70	°C
Minimum Storage Temperature	T_{sl}	-40	°C
Maximum Storage Temperature	T_{sh}	70	°C
TEC Current	I_t	1.5	A

Packaging:

14pinDIL:			
№	Parameter	№	Parameter
1	Cooler anode +	8	PD anode -
2	NC	9	LD cathode -
3	NC	10	NC
4	NC	11	Thermistor
5	LD anode +	12	Thermistor
6	NC	13	NC
7	PD cathode +	14	Cooler cathode -

