


Laser Diode 1064nm 1000mW

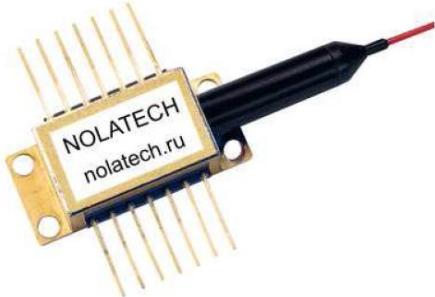

FPL-1064-14BF-1W is single mode laser diode module designed for optical measurement and communication. The laser is packaged in 14-pin standard butterfly package with monitor photodiode and thermo-electric cooler (TEC). Module is pigtailed with 0,7-1,0 m of single mode polarization maintaining fiber and connectorized by FC/PC connector.

Key Features

- Optical output: 1000mW
- Efficient coupling into single mode fiber
- Pulsed operation
- SM or PM Fiber ($\varnothing 0.9\text{mm}$)
- FC-PC connector
- 14-pin butterfly package
- Internal monitor PD and TEC
- Low power consumption

Optical and electrical characteristics: ($T = 25^\circ\text{C}$)

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Output Power	P_f			1000		mW
Pulsed Forward Current	I_{FP}	$P_f=1000\text{mW}$		1000	1500	mA
Pulse Duration	t_p				100	ns
Duty Cycle	D				0.1	%
Forward Voltage	V_F	$P_f=1000\text{mW}$			2.5	V
Threshold Current	I_{th}			20	40	mA
Center Wavelength	λ_c	$P_f=1000\text{mW}$	1054	1064	1074	nm
Spectral Width	$\Delta\lambda$	$P_f=1000\text{mW}$		1	3	nm
Monitor Current	I_m	$P_f=1000\text{mW}, V_{RD}=5\text{V}$	40		5000	μA
PD Dark Current	I_d	$V_{RD}=5\text{V}$			0.1	μA
Cooler Voltage	V_C	$I_F=EOL, TC=70^\circ\text{C}$			2.7	V
Cooler Current	I_c	$I_F=EOL, TC=70^\circ\text{C}$			1.4	A
Thermal Resistance	R_o	$T_{LD}=25^\circ\text{C}, B=3900\pm100\text{K}$	9.5	10.0	10.5	$\text{k}\Omega$
Extinction Ratio	X_P	$P_f=1000\text{mW}$	17			dB

Absolute Maximum Ratings

Item	Symbol	Rating	Unit
LD Forward Current	I_f	2000	mA
LD Reverse Voltage	V_r	1.8	V
PD Reverse Voltage	V_{RD}	10	V
Operation Case Temperature	T_c	-40 to +70	°C
Storage Temperature	T_{stg}	-40 to +85	°C
Cooler Current	I_c	1.4	A

PACKAGING

No.	FUNCTION	No.	FUNCTION
1	Cooler anode	8	NC
2	Thermistor	9	NC
3	PD anode	10	LD anode
4	PD cathode	11	LD cathode
5	Thermistor	12	NC
6	NC	13	Case
7	NC	14	Cooler cathode

